

## Seal Food Merchandiser (500 Refrigerated)

### Key Features

- Type: Refrigerated counter-top unit
- Side-mounted power pack
- R404a refrigerant
- Thermostatic temperature control with digital display
- Cabinet temperature 3°-5°C
- Fan cooled condenser
- Automatic defrost and condensate water evaporation
- Blown air circulation
- Diffused internal light
- Adjustable shelf positions
- Supplied with chrome plated shelf
- Meets the performance requirements of BS EN ISO 23953-2:2005 Climate Class 3M1



D5R/100B

### Construction

- Body: powder coated aluminium frame (silver)
- Internal components: stainless steel grade 430
- Glazing: toughened safety glass, double glazed
- Door: sliding rear doors
- Panel: black plastic coated steel
- Base plinth: black plastic coated steel
- Shelves: chrome plated

### Available Options


- Choice of two widths
- Choice of self-service and back service
- 60Hz supply (price on request)

### Available Accessories

N/A

## Specifications

Model	D5R/100B	D5R/100S	D5R/125B	D5R/125S
External height (mm)	575			
External width (mm)	1000	1000	1250	1250
External depth (mm)	500			
Capacity net volume (litres)	102.50		142.00	
Back or Self-service	Back	Self-Service	Back	Self-Service
Number of Shelves (including base)	2			
Shelf dimensions W x D (mm)	650 x 375		900 x 375	
Cabinet temperature (°C)	3°C – 5°C			
Food holding temperature(°C)	3°C –7°C			
Maximum ambient temperature (°C)	32°C			
Maximum ambient relative humidity (%)	70%			
Total power rating kW	0.602		0.621	
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	3			
Net weight unpacked (kg)	84		100	
Gross weight packed (kg)	102		120	
Shipping volume (m <sup>3</sup> )	0.776		0.966	

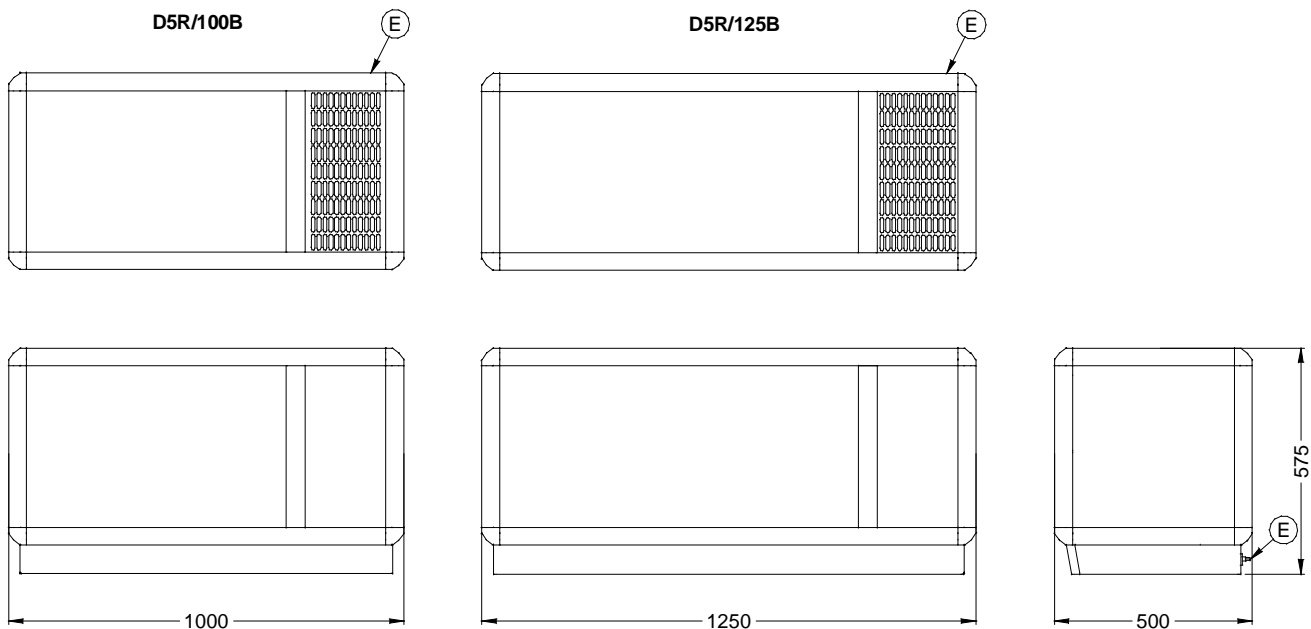

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:  
SEAL500REF  
Issue date: Dec-09