

Opus 700 Boiling Tops

Key Features

- Type: Gas
- Dual concentric burners
- Individual pan supports
- Fully sealed hob top
- Low level rear flue
- Manual ignition
- Piezo ignitor wand
- Supplied on height adjustable legs



OG7004

Construction

- Body: stainless steel grade 430
- Hob top: stainless steel grade 304
- Pan supports: enamelled cast iron

Available Options


- Natural gas
- Propane gas
- Butane gas
- Choice of two, four or six burners

Available Accessories

- OA7934 Floor stand for OG7009 (for use only within a cook line)
- OA7917 Floor stand for OG7003
- OA7914 Floor stand for OG7004
- OA7903 Drop on aluminium griddle plate

Specifications

Model	OG7009	OG7003	OG7004
External height (mm)	325	325	325
External width (mm)	300	600	900
External depth (mm)	737	737	737
Net weight unpacked (kg)	30	58	84
Gross weight packed (kg)	38	66	94
Shipping volume (m ³)	0.165	0.301	0.429
Hob	2 gas open burners	4 gas open burners	6 gas open burners
Heat input per burner Natural (kW)	5.5		
Heat input per burner Propane (kW)	5.1		
Heat input per burner Butane (kW)	5.1		
Total heat input Natural (kW)	11.0	22.0	33.0
Total heat input Propane (kW)	10.2	20.4	30.6
Total heat input Butane (kW)	10.2	20.4	30.6
Gas consumption at full rate Natural (m ³ h ⁻¹)	1.05	2.1	3.15
Gas consumption at full rate Propane (kg h ⁻¹)	0.73	1.46	2.19
Gas consumption at full rate Butane (kg h ⁻¹)	0.74	1.48	2.22
Gas inlet	G ½ female		
Btu/h conversion	kW x 3412		

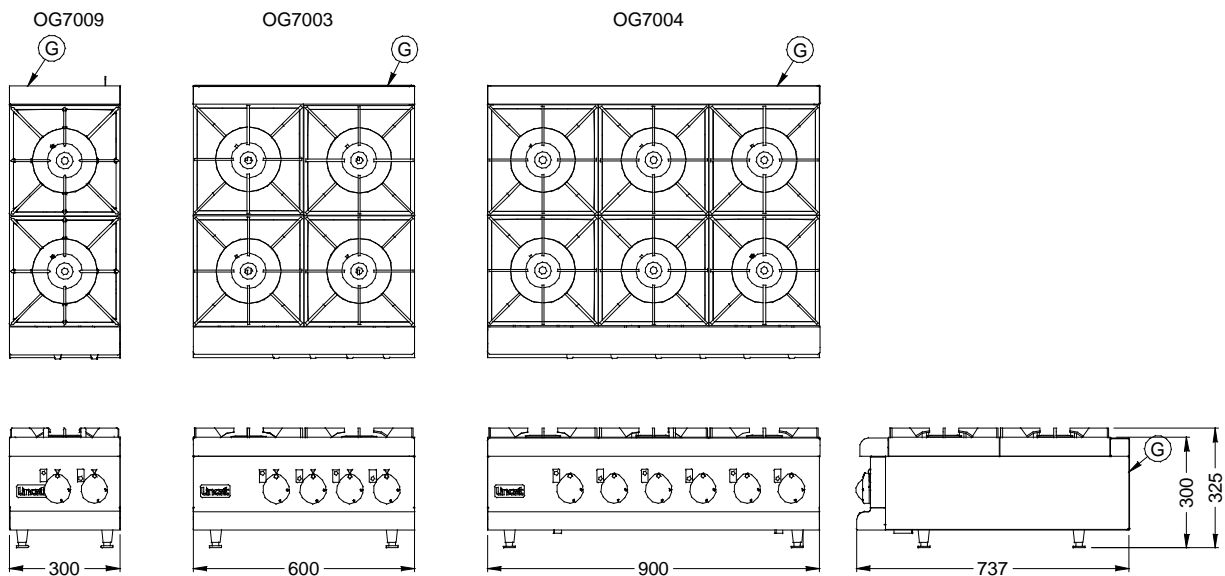

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
OPUSGASBOILING
Issue date: Oct-09